

ADVANCED LVP UNDERLAYMENT

HFU70015

100 ft²

LIGHTWEIGHT

Fanfold design is easy to carry, faster to install, and will not curl like traditional underlayment rolls


9X MORE PROTECTION OVER THE INDUSTRY STANDARD

QUIETER

Reduces sound transmission for quieter footfalls and prevents sound transfer from room to room or floor to floor

| | | | |
|-----|-----|---------|-----|
| IIC | STC | DELTA Δ | IIC |
| 72 | 62 | | 28 |

Tested on 8" slab with a suspended ceiling
Meets or exceeds most building code requirements.
Respecte ou dépasse la majorité des exigences des codes de construction.
Cumple o excede la mayoría de requerimientos del código de construcción.

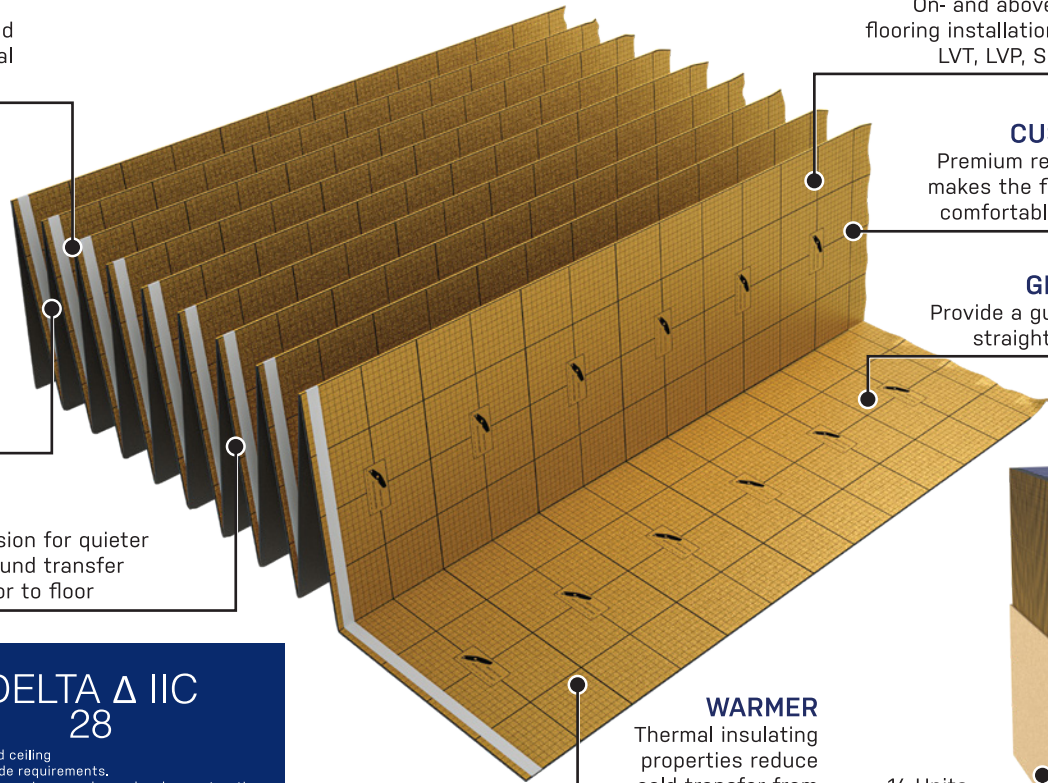

FOR USE

On- and above-grade vinyl flooring installations, including LVT, LVP, SPC and WPC

CUSHIONING

Premium recycled foam makes the flooring more comfortable to walk on

GRID LINES

Provide a guide to make straight cuts easier

WARMER

Thermal insulating properties reduce cold transfer from subfloor to flooring

14 Units per display





Homelux® Advanced Universal Underlayment is the superior solution for protecting and maintaining LVP, SPC and WPC flooring. Crafted with recycled foam and a foil barrier, this 1.5 mm thick underlayment provides cushioning, moisture protection, thermal insulation and more. A fanfold design, integrated overlap system and grid lines help speed up installation. This underlayment meets or exceeds most building code requirements.



TECHNICAL DATA

- Thermal Resistance ASTM C518: R-Value 0.39
- Compression Set @ 50% ASTM D3575: 9.3%
- Compression Strength 25% ASTM D3575: 13.9 PSI
- Residual Indentation ASTM F1914: 0.033 inch
- Flammability Rating: PASS Federal Flammability Standard CPSC FF1-70
- Smoke Density: PASS ASTM E662
- Moisture Protection: 0.358 lbs/1,000 sq.ft./24 hrs

Tape and overlap system seals out moisture

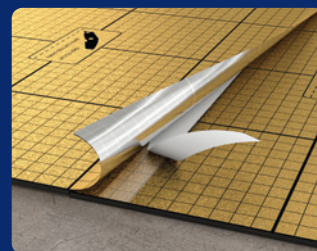

HFUTAPE
For a complete barrier over concrete subfloors, use HOMELUX® Underlayment Seam Tape to adjoin end joints and special cuts.